



LAMA+

- Range of indoor and outdoor suspended LED fixtures, comprising:
- Polyester powder coated die-cast aluminium housing
 - Diffuser with integrated louvre in UV, heat stabilised, transparent technopolymer
 - High-transparency polycarbonate lenses for best light transmission
 - S/W optic with UGR<22
 - Anti-ageing silicone gasket with high resiliency
 - Cable compartment cover in technopolymer
 - Electrical connection with outdoor rated plug & socket quick connector (IP66) that allows connection to mains without opening the luminaire. Made in PA66 with silver-plated brass contacts, for cables Ø 9 - Ø 12 mm
 - Light beam obtained by the combination of multiple LED modules
 - Galvanised steel suspension hooks
 - Stainless steel external screws
 - When using the product within environments where mineral or natural oils are present or in atmospheres that are not compatible with polycarbonate, the protective glass available as accessory shall be used
 - LAMA+ DETEK is not suitable for operation with the protective glass shade
 - Passive infra-red motion sensor
 - The version SMART is equipped with an intelligent light management device; it is designed on a wireless Plattform at 868MHz. Installations can be produced with it which dynamically interact with the environment. Specific accessories for the management of the system.

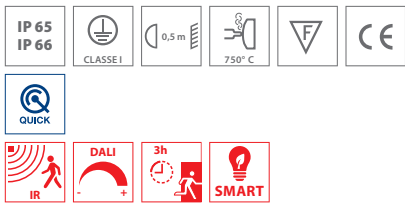

○ WH-87 / White / Textured



LAMA+ S/W

IK07 2.6J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	$\cos \phi \geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	EURO
Power LED 220/240 V 50/60 Hz																
LED	68 W	I		80	4000	•	S/W	-	12096 lm	-	70	10	60000 h	○	06280387	
LED	101 W	I		80	4000	•	S/W	-	16128 lm	-	70	10	60000 h	○	06272187	
LED	148 W	I		80	4000	•	S/W	-	24408 lm	-	70	10	60000 h	○	06280287	
LED	205 W	I		80	4000	•	S/W	-	32544 lm	-	70	10	60000 h	○	06272087	



Power LED - dimmable DALI 220/240 V 50/60 Hz

LED	68 W	I		80	4000	•	S/W	-	12096 lm	-	70	10	60000 h	○	06281187	
LED	101 W	I		80	4000	•	S/W	-	16128 lm	-	70	10	60000 h	○	06272987	
LED	148 W	I		80	4000	•	S/W	-	24408 lm	-	70	10	60000 h	○	06281087	
LED	205 W	I		80	4000	•	S/W	-	32544 lm	-	70	10	60000 h	○	06272887	



LAMA+ S/W SMART

IK07 2.6J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	$\cos \phi \geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	EURO
Power LED 220/240 V 50/60 Hz																
LED	68 W	I		80	4000	•	S/W	-	12096 lm	-	70	10	60000 h	○	06281987	
LED	101 W	I		80	4000	•	S/W	-	16128 lm	-	70	10	60000 h	○	06273787	
LED	148 W	I		80	4000	•	S/W	-	24408 lm	-	70	10	60000 h	○	06281887	
LED	205 W	I		80	4000	•	S/W	-	32544 lm	-	70	10	60000 h	○	06273687	

LAMA+ S/W DETEK

IK07 2.6J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	$\cos \phi \geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	EURO
Power LED 220/240 V 50/60 Hz																
LED	68 W	I		80	4000	•	S/W	-	12096 lm	-	70	10	60000 h	○	06281587	
LED	101 W	I		80	4000	•	S/W	-	16128 lm	-	70	10	60000 h	○	06273387	
LED	148 W	I		80	4000	•	S/W	-	24408 lm	-	70	10	60000 h	○	06281487	
LED	205 W	I		80	4000	•	S/W	-	32544 lm	-	70	10	60000 h	○	06273287	



LAMA+ S/W EM

IK07 2.6J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	$\cos \phi \geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	EURO
Power LED - Emergency 220/240 V 50/60 Hz																
LED	68 W	I		80	4000	•	S/W	-	12096 lm	-	70	10	60000 h	○	06282387	
LED	101 W	I		80	4000	•	S/W	-	16128 lm	-	70	10	60000 h	○	06274187	
LED	148 W	I		80	4000	•	S/W	-	24408 lm	-	70	10	60000 h	○	06282287	
LED	205 W	I		80	4000	•	S/W	-	32544 lm	-	70	10	60000 h	○	06274087	



LAMA+ S/EW

IK07 2.6J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	EURO
Power LED 220/240 V 50/60 Hz																
LED	68 W	I		80	4000	•	S/EW	-	12096 lm	10145 lm	70	10	60000 h	○	06280187	
LED	101 W	I		80	4000	•	S/EW	-	16128 lm	14703 lm	70	10	60000 h	○	06271987	
LED	148 W	I		80	4000	•	S/EW	-	24408 lm	22237 lm	70	10	60000 h	○	06280087	
LED	205 W	I		80	4000	•	S/EW	-	32544 lm	28342 lm	70	10	60000 h	○	06271887	

Power LED - dimmable DALI 220/240 V 50/60 Hz

LED	68 W	I		80	4000	•	S/EW	-	12096 lm	10145 lm	70	10	60000 h	○	06280987	
LED	101 W	I		80	4000	•	S/EW	-	16128 lm	14703 lm	70	10	60000 h	○	06272787	
LED	148 W	I		80	4000	•	S/EW	-	24408 lm	22237 lm	70	10	60000 h	○	06280887	
LED	205 W	I		80	4000	•	S/EW	-	32544 lm	28342 lm	70	10	60000 h	○	06272687	



LAMA+ S/EW SMART

IK07 2.6J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	EURO
Power LED 220/240 V 50/60 Hz																
LED	68 W	I		80	4000	•	S/EW	-	12096 lm	10145 lm	70	10	60000 h	○	06281787	
LED	101 W	I		80	4000	•	S/EW	-	16128 lm	14703 lm	70	10	60000 h	○	06273587	
LED	148 W	I		80	4000	•	S/EW	-	24408 lm	22237 lm	70	10	60000 h	○	06281687	
LED	205 W	I		80	4000	•	S/EW	-	32544 lm	28342 lm	70	10	60000 h	○	06273487	

LAMA+ S/EW DETEK

IK07 2.6J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	EURO
Power LED 220/240 V 50/60 Hz																
LED	68 W	I		80	4000	•	S/EW	-	12096 lm	10145 lm	70	10	60000 h	○	06281387	
LED	101 W	I		80	4000	•	S/EW	-	16128 lm	14703 lm	70	10	60000 h	○	06273187	
LED	148 W	I		80	4000	•	S/EW	-	24408 lm	22237 lm	70	10	60000 h	○	06281287	
LED	205 W	I		80	4000	•	S/EW	-	32544 lm	28342 lm	70	10	60000 h	○	06273087	



LAMA+ S/EW EM

IK07 2.6J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	EURO
Power LED - Emergency 220/240 V 50/60 Hz																
LED	68 W	I		80	4000	•	S/EW	-	12096 lm	10145 lm	70	10	60000 h	○	06282187	
LED	101 W	I		80	4000	•	S/EW	-	16128 lm	14703 lm	70	10	60000 h	○	06273987	
LED	148 W	I		80	4000	•	S/EW	-	24408 lm	22237 lm	70	10	60000 h	○	06282087	
LED	205 W	I		80	4000	•	S/EW	-	32544 lm	28342 lm	70	10	60000 h	○	06273887	



MANDATORY ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER	EURO
LAMA+ SMART			
USB KEY		14469720	
Trasmitter		14469820	
Sensor movement		14469920	



14469720



14475820



14475920

OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER	EURO
LAMA+			
Transparent protective glass		14475720	
Protective grid LAMA+.		14475620	
Recessed Frame in painted steel for installation in false ceilings and platform roofs of petrol stations		14475820	



14475720



14475620



14475820