

GUELL 2



● GR-94 / Metallic grey / Textured

LED floodlight for indoor and outdoor lighting, comprising:

- Die-cast aluminum housing chemically pre-treated and painted with polyester powder coating
- Flat tempered glass diffuser
- Very high performance reflectors made of 99.99% plated aluminium, polished, oxidised and free of iridescence
- Anti-ageing silicone gasket
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- Stainless steel external screws
- Fully integrated stainless steel aluminium spring clips
- Powder coated steel bracket
- On request, versions with dimmable ballast available
- 3000 K and 5000 K available upon request




GUELL 2
A/W



GUELL 2
S/W




GUELL 2
C/I

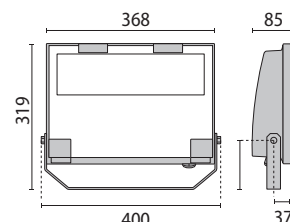

GUELL 2 A/W

IK07 3J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	EURO
Power LED 220/240 V 50/60 Hz															
LED	78 W	I	80	4000	•	A40/W	-	11116 lm	9289 lm	70	10	150000 h	●	06094694	
LED	105 W	I	80	4000	•	A40/W	-	14552 lm	11551 lm	70	10	130000 h	●	06094494	



GUELL 2 S/W

IK07 3J xx5


LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	EURO
Power LED 220/240 V 50/60 Hz															
LED	78 W	I	80	4000	•	S/W	-	11116 lm	9520 lm	70	10	150000 h	●	06094294	
LED	105 W	I	80	4000	•	S/W	-	14552 lm	11863 lm	70	10	130000 h	●	06094094	



GUELL 2 C/I


IK07 3J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	EURO
Power LED 220/240 V 50/60 Hz															
LED	78 W	I	80	4000	•	C/I	-	11116 lm	8854 lm	70	10	150000 h	●	06286794	
LED	105 W	I	80	4000	•	C/I	-	14552 lm	10990 lm	70	10	150000 h	●	06287394	




OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER	EURO
GUELL 2			
Protective grid GUELL 2		14173502	
Connection box IP 66		14174220	
Wall support 500 mm/19.69" GUELL 1/2	●	14173394	
Wall support 1000 mm/39.37" GUELL 1/2	●	14173494	
Single pole top support GUELL 2	●	14174094	
Double pole top support GUELL 2	●	14174194	
Reinforcing bracket GUELL 2 in painted steel. Used to fasten the floodlight with a single screw in the centre of the bracket.	●	14460594	
GUELL 2 A/W - GUELL 2 S/W			
Soft glass GUELL 2	●	14173994	
GUELL 2 A/W			
Cover GUELL 2 Asymmetrical	●	14173694	
Louvre GUELL 2 Asymmetrical		14173820	
GUELL 2 S/W			
Louvre GUELL 2 Symmetrical		14173720	
GUELL 2 C/I			
GUELL 2/C GR-94 frosted glass.	●	14476794	



14173720




14173820




14173694



14173994




14173502

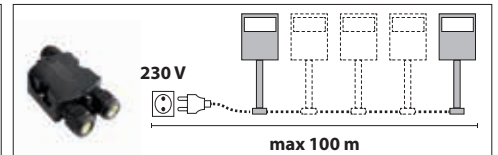

14174220



14173394




14173494




14174094



14174194



14476794




14460594




max 3,6 kg



0,100 m²



0,018 m²



0,030 m²

